



BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		INITIAL RELEASE	2009.04.10	A.0

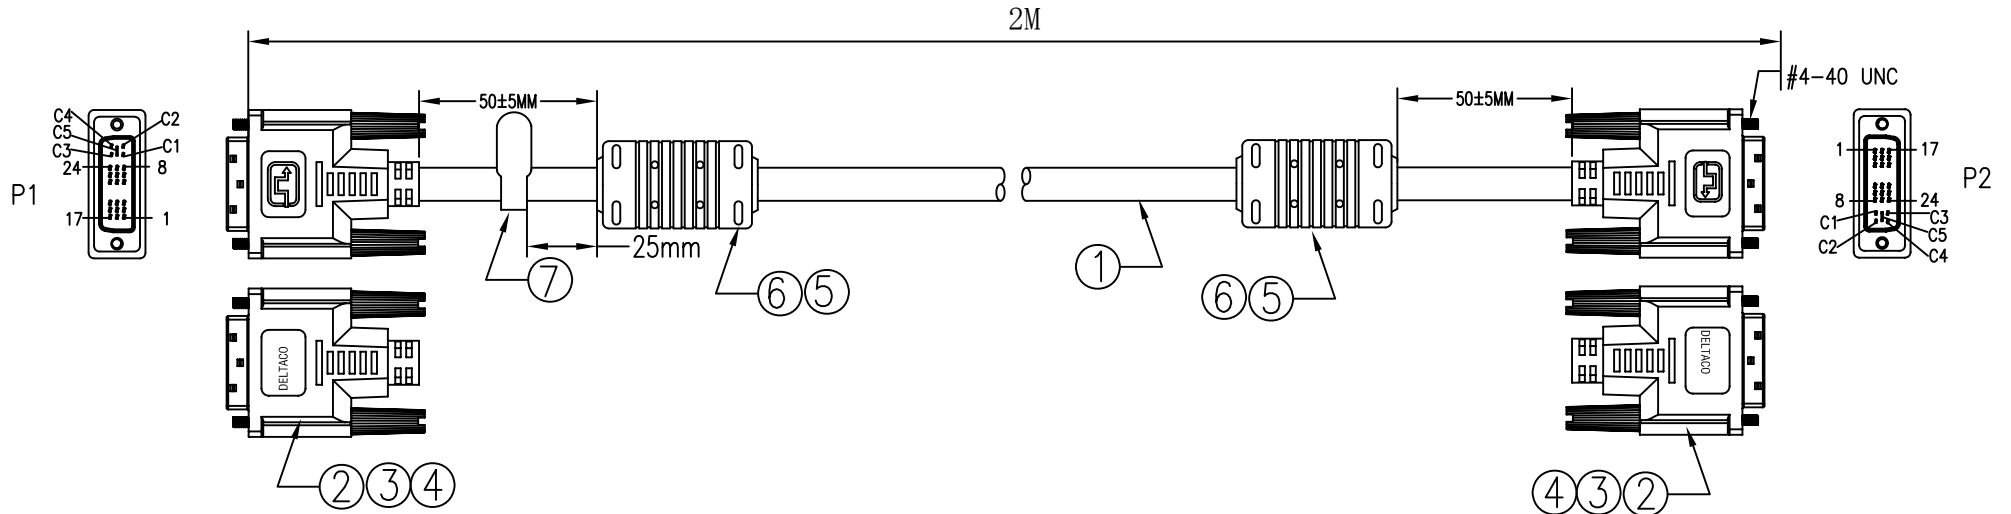

PIN OUT		PIN OUT	
P1	P2	P1	P2
C1	C1	1	1
C5	C5	2	2
C2	C2	3	3
C5	C5	9	9
C3	C3	10	10
C5	C5	11	11
C4	C4	17	17
		18	18
		19	19
		23	23
		24	24
		22	22
		6	6
		7	7
		8	8
		14	14
		15	15
		16	16
		SHELL	SHELL

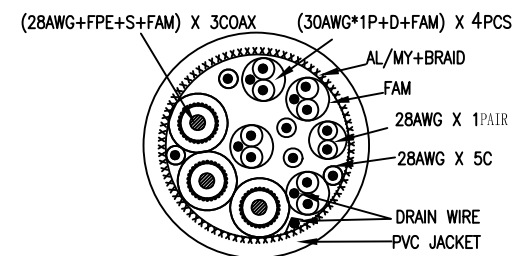

⑦	TAG	1PCS	DELTAO TAG
⑥	CORE MOLD	2PCS	BLACK PVC
⑤	CORE	2PCS	OD*ID*L: 17.5*10.5*28.5mm
④	SCREW	2PCS	#4-40 UNC, HOOD MOLDED: BLACK PVC
③	DVI HOOD	2PCS	BLACK PVC
②	DVI(18+5)M	1PCS	GOLD PLATED SHELL
①	CABLE	1PCS	(30AWG*1P+D+FAM)*4+(28AWG+S+FAM)*3+28AWG*1P+28AWG*5C+AEB OD:9.0mm BLACK PVC JACKET
NO.	PARTS NAME	Q'TY	SPECIFICATION

NOTES:
 1.ELECTRICAL PROPERTIES:
 1.1 100% OPEN AND SHORT TEST
 1.2 CONDUCTOR RESISTANCE: 5 OHMS
 1.3 INSULATION RESISTANCE: 10 MEGOHMS
 1.4 HI-POT: DC300V/0.01S
 1.5 100% HDTV, BLUE PAY DVD TEST(1080P: 7M); (1080I: 10M,15M)
 1.6 ALL CABLE PROCESS SHOULD BE CONTROLLED BY ATC TEST DEVICE.
 2. ALL MATERIAL BE RoHS COMPLIANT.

APPROVED	CHECKED	DRAWN	CUSTOMER :
			ITEM NO . DVI-624A
			DRAW NO .
			UNIT m m
			SCALE NONE

DESCRIPTION :
 DVI(18+5)/M-DVI(18+5)/M

